




HIGH SPEED HYDRAULIC PRESS



HONEYTECH
Controls (I) Pvt. Ltd.


*Incorporating
Indigenously Developed
New Design*

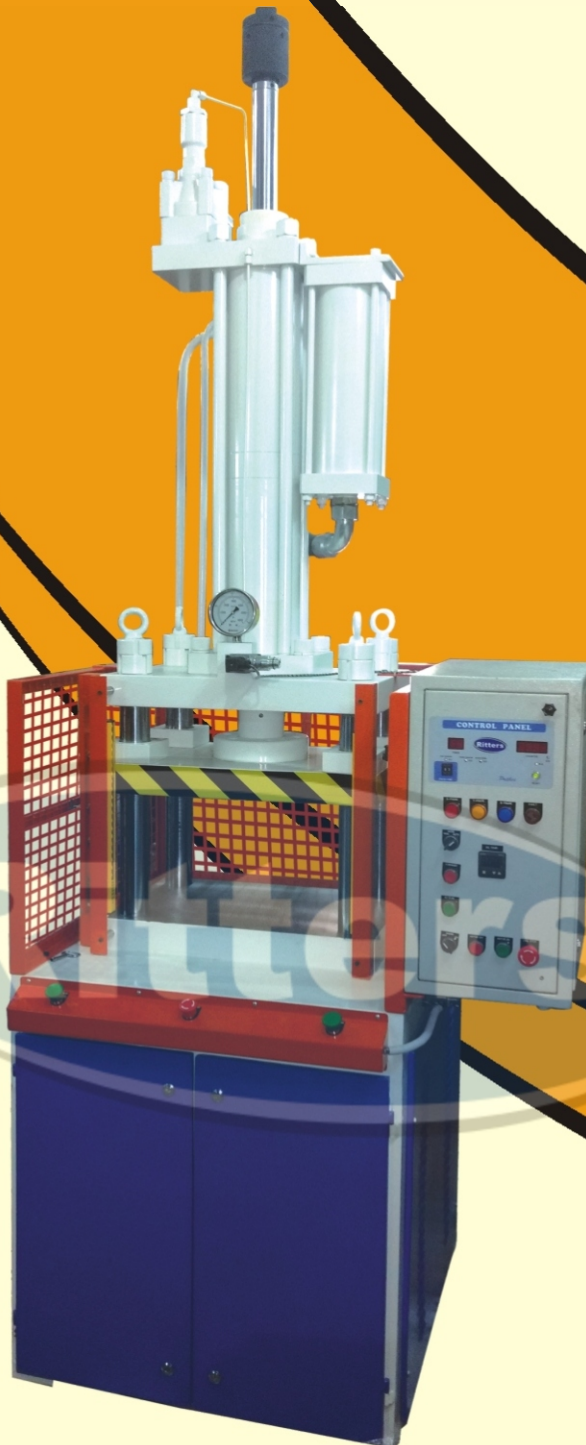

*Faster Action
Energy Efficient
Flexibility
Low Oil Temperature*

'C' FRAME PRESS



TECHNICAL DATA

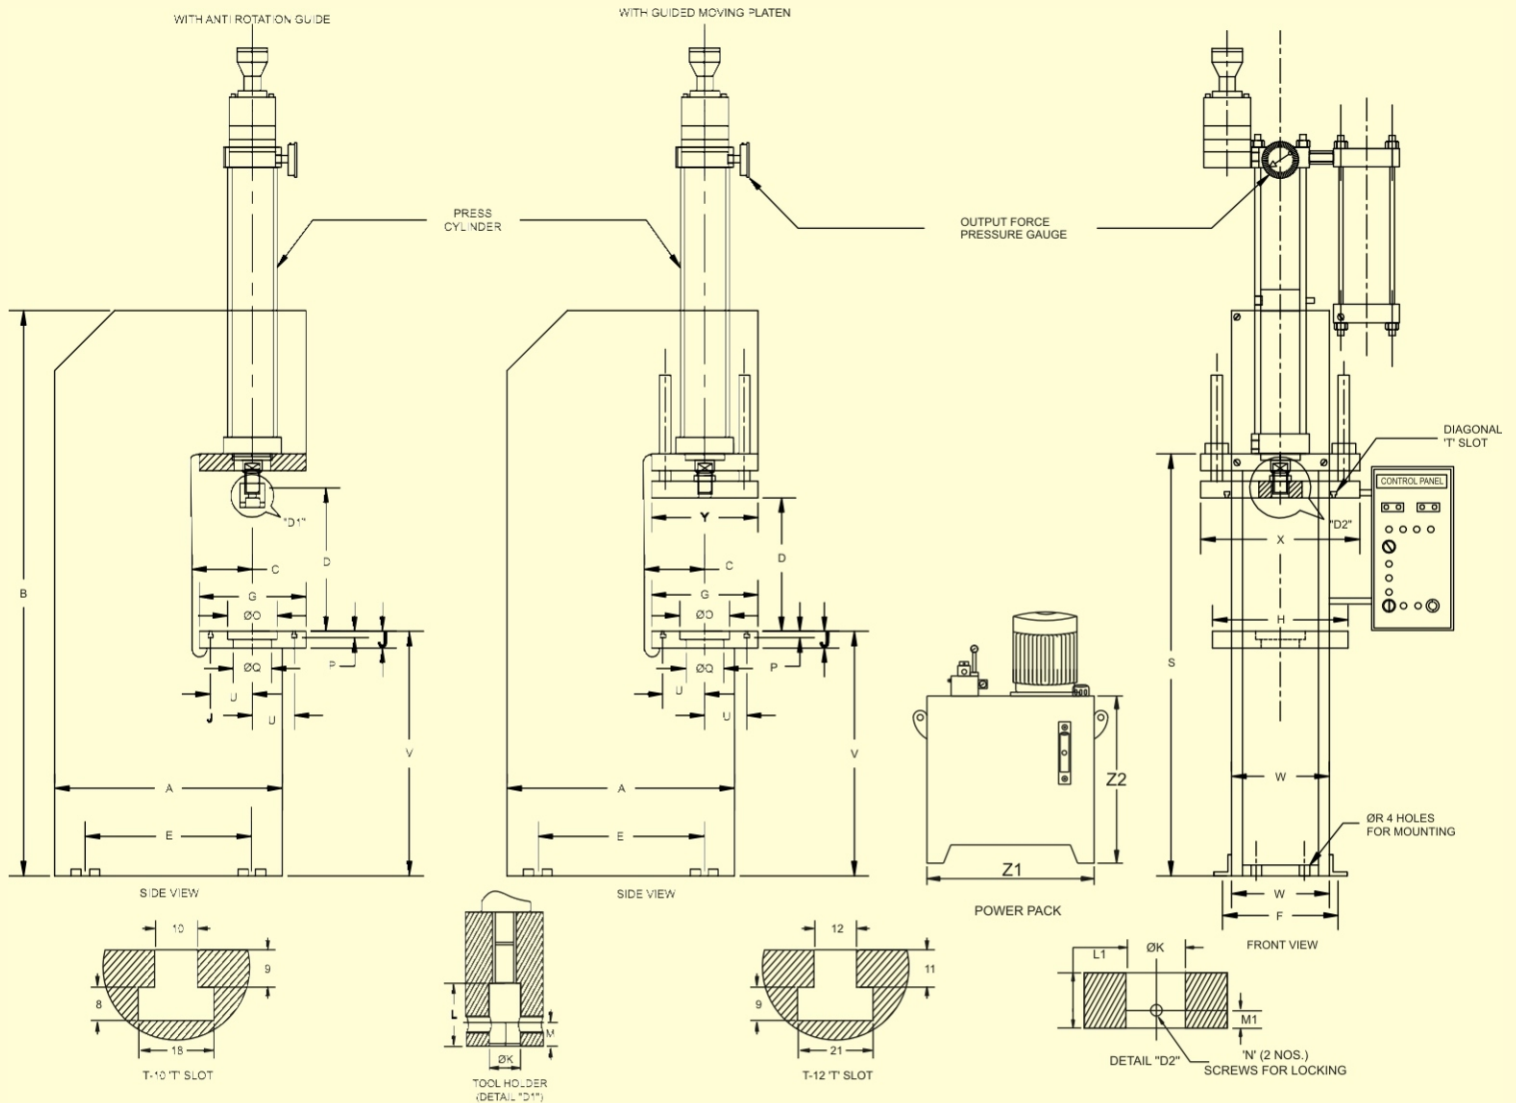

WITH ARG	WITH GMP	TON	A	B	C	D	E	F	G	H	J	ØK	L	L1	M	M1	N	ØO	P	ØQ	T	U	V	W	X	Y	Z1	Z2
RA-03-HCAF	RA-03-HCGF	3	550	1450	125	250	350	260	250	250	38	20	25	38	10	10	M6	60	18	45	10	75	880	355	275	200	450	450
RA-05-HCAF	RA-05-HCGF	5	600	1670	150	300	400	285	280	280	43	25	30	43	10	12	M8	75	18	55	10	100	945	355	340	200	500	500
RA-10-HCAF	RA-10-HCGF	10	650	1960	175	300	500	360	350	350	53	25	40	53	10	12	M8	105	20	75	12	100	950	400	420	230	550	550
RA-15-HCAF	RA-15-HCGF	15	700	1970	200	350	550	400	380	380	62	30	60	62	10	12	M8	130	25	90	12	125	950	400	450	250	600	600
RA-20-HCAF	RA-20-HCGF	20	700	1970	200	350	550	400	380	380	62	30	60	62	10	12	M8	130	25	90	12	125	950	400	450	250	600	600
RA-30-HCAF	RA-30-HCGF	30	900	1980	200	350	600	440	380	380	72	40	80	72	12	15	M10	130	25	90	12	125	950	400	500	250	650	650
RA-50-HCAF	RA-50-HCGF	50	1100	2250	200	400	750	475	400	400	80	40	80	72	12	20	M12	130	30	90	16	150	960	400	525	250	750	750

4 PILLAR PRESS


TECHNICAL DATA

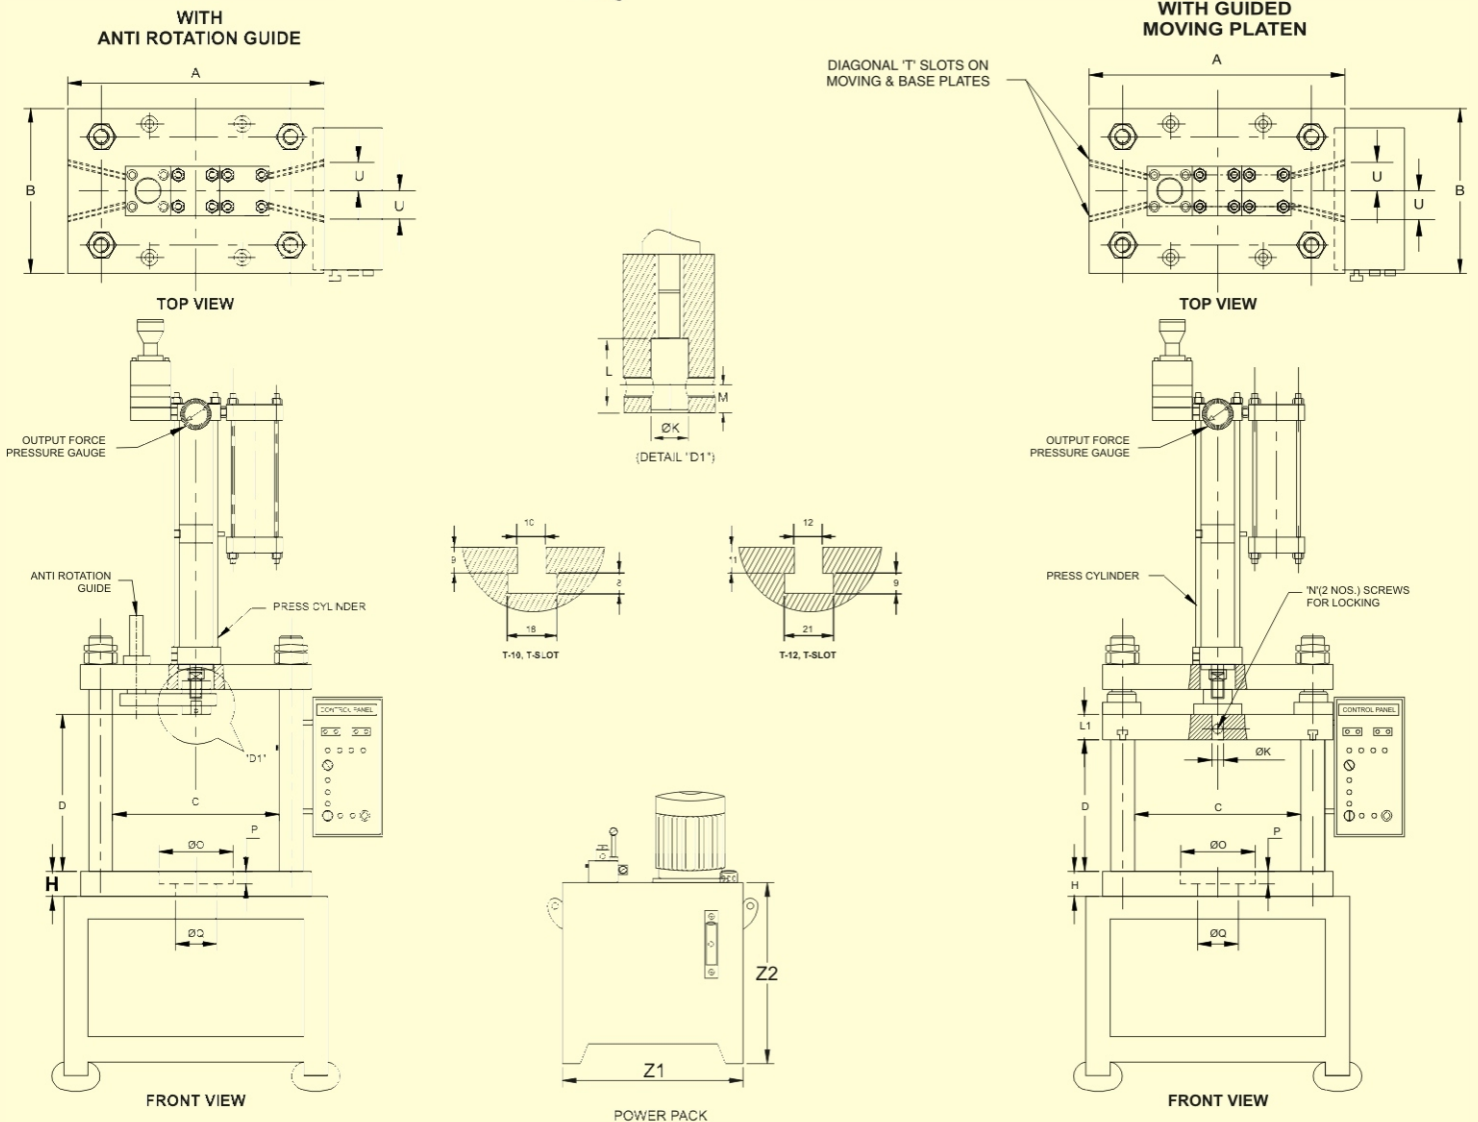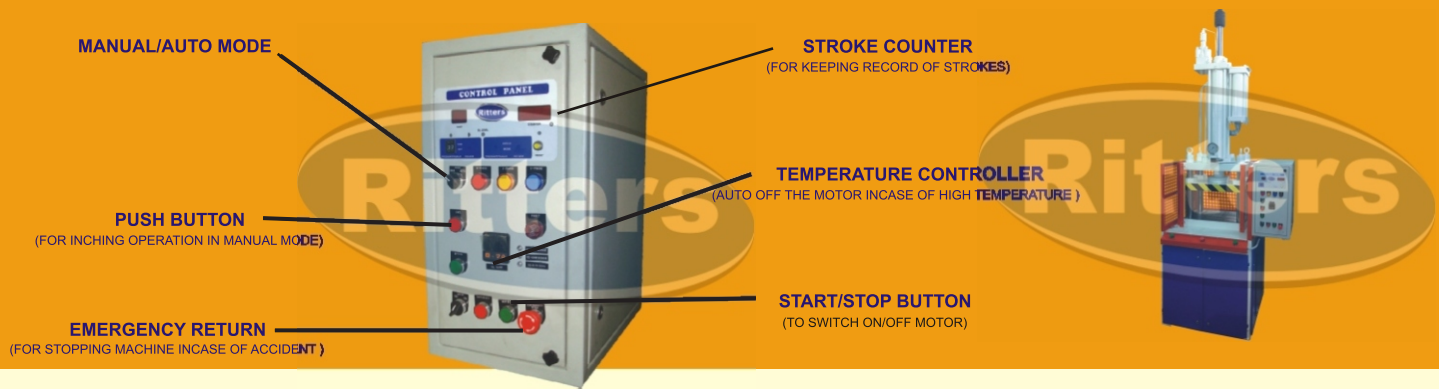

WITH ARG	WITH GMP	TON	A	B	C	D	H	ØK	L	L1	M	N	ØO	P	ØQ	T	U	Z1	Z2
RA-03-H4PA	RA-03-H4PG	3	350	300	250	270	32	20	25	32	10	M6	60	18	45	10	75	450	450
RA-05-H4PA	RA-05-H4PG	5	400	300	300	300	38	25	30	38	10	M8	75	18	55	10	75	500	500
RA-10-H4PA	RA-10-H4PG	10	500	350	350	350	53	25	40	53	10	M8	105	20	75	12	75	550	550
RA-15-H4PA	RA-15-H4PG	15	510	350	350	350	58	25	50	58	10	M8	130	25	90	16	80	600	600
RA-20-H4PA	RA-20-H4PG	20	510	350	350	350	62	25	60	62	10	M8	130	25	90	16	80	600	600
RA-30-H4PA	RA-30-H4PG	30	590	400	400	400	72	30	80	72	10	M10	130	25	90	16	90	650	650
RA-50-H4PA	RA-50-H4PG	50	830	600	600	450	100	40	80	100	12	M12	130	30	90	16	100	750	700

HIGH SPEED HYDRAULIC CYLINDER

Technical Data

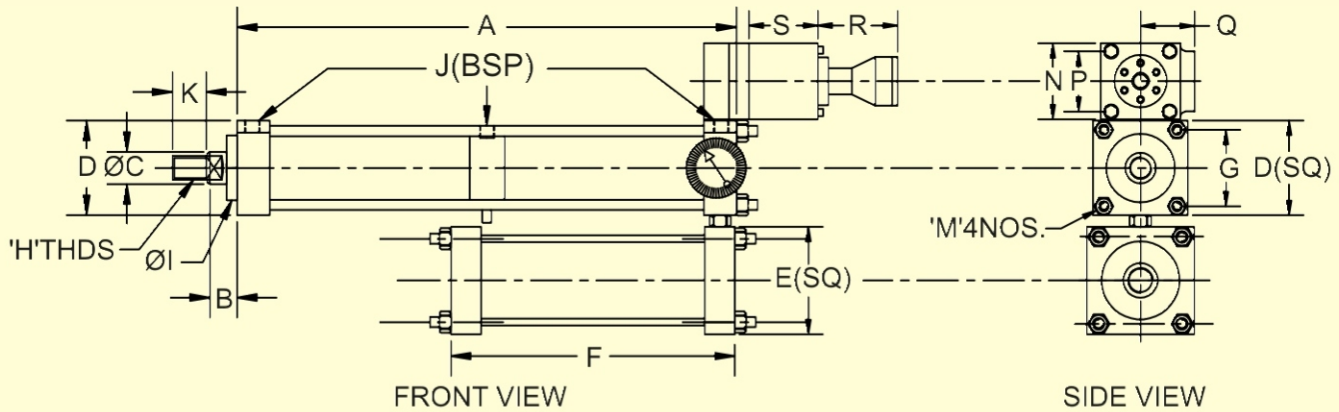

MODEL NO.	TON	TOTAL STROKE	PUMP	HP	W.Pr.	APP/RET. SPEED MM/SEC	PRESS SPEED MM/SEC	APP/RET. LOAD/KG	A	B	C	D (SQ.)	E (SQ.)	F	G	H	ØI	J	K	M	N	P	Q	R	S
HS-03-50	3	50	6	1.5	85	220	28	385	350	40	32	90	110	320	65	M24X2	65	3/8"BSP	35	M12X1.75	100	75	65	127	103
HS-03-75	3	75	6	1.5	85	220	28	385	400	40	32	90	110	320	65	M24X2	65	3/8"BSP	35	M12X1.75	100	75	65	127	103
HS-03-100	3	100	6	1.5	85	220	28	385	450	40	32	90	110	320	65	M24X2	65	3/8"BSP	35	M12X1.75	100	75	65	127	103
HS-03-150	3	150	6	1.5	85	220	28	385	550	40	32	90	110	420	65	M24X2	65	3/8"BSP	35	M12X1.75	100	75	65	127	103
HS-03-200	3	200	6	1.5	85	220	28	385	650	40	32	90	110	420	65	M24X2	65	3/8"BSP	35	M12X1.75	100	75	65	127	103
HS-05-50	5	50	8	2	95	290	24	430	380	40	32	110	125	330	84.5	M24X2	65	1/2"BSP	35	M16X2	100	75	65	127	103
HS-05-75	5	75	8	2	95	290	24	430	430	40	32	110	125	330	84.5	M24X2	65	1/2"BSP	35	M16X2	100	75	65	127	103
HS-05-100	5	100	8	2	95	290	24	430	480	40	32	110	125	330	84.5	M24X2	65	1/2"BSP	35	M16X2	100	75	65	127	103
HS-05-150	5	150	8	2	95	290	24	430	580	40	32	110	125	430	84.5	M24X2	65	1/2"BSP	35	M16X2	100	75	65	127	103
HS-05-200	5	200	8	2	95	290	24	430	680	40	32	110	125	430	84.5	M24X2	65	1/2"BSP	35	M16X2	100	75	65	127	103
HS-10-50	10	50	10	3	120	200	19	990	430	52	38	135	165	340	105	M36X2	100	1/2"BSP	50	M20X2.5	100	75	65	127	103
HS-10-75	10	75	10	3	120	200	19	990	480	52	38	135	165	340	105	M36X2	100	1/2"BSP	50	M20X2.5	100	75	65	127	103
HS-10-100	10	100	10	3	120	200	19	990	530	52	38	135	165	340	105	M36X2	100	1/2"BSP	50	M20X2.5	100	75	65	127	103
HS-10-150	10	150	10	3	120	200	19	990	630	52	38	135	165	440	105	M36X2	100	1/2"BSP	50	M20X2.5	100	75	65	127	103
HS-10-200	10	200	10	3	120	200	19	990	730	52	38	135	165	440	105	M36X2	100	1/2"BSP	50	M20X2.5	100	75	65	127	103
HS-15-50	15	50	18	5	115	260	22	1310	490	75	50	165	190	350	126	M40X2	110	3/4"BSP	50	M24X3	100	75	65	127	103
HS-15-75	15	75	18	5	115	260	22	1310	540	75	50	165	190	350	126	M40X2	110	3/4"BSP	50	M24X3	100	75	65	127	103
HS-15-100	15	100	18	5	115	260	22	1310	590	75	50	165	190	350	126	M40X2	110	3/4"BSP	50	M24X3	100	75	65	127	103
HS-15-150	15	150	18	5	115	260	22	1310	690	75	50	165	190	450	126	M40X2	110	3/4"BSP	50	M24X3	100	75	65	127	103
HS-15-200	15	200	18	5	115	260	22	1310	790	75	50	165	190	450	126	M40X2	110	3/4"BSP	50	M24X3	100	75	65	127	103
HS-20-50	20	50	20	5	105	150	17	2300	520	75	60	190	190	450	150	M48X3	125	3/4"BSP	50	M24X3	120	90	75	157	113
HS-20-75	20	75	20	5	105	150	17	2300	570	75	60	190	190	450	150	M48X3	125	3/4"BSP	50	M24X3	120	90	75	157	113
HS-20-100	20	100	20	5	105	150	17	2300	620	75	60	190	190	450	150	M48X3	125	3/4"BSP	50	M24X3	120	90	75	157	113
HS-20-150	20	150	20	5	105	150	17	2300	720	75	60	190	190	450	150	M48X3	125	3/4"BSP	50	M24X3	120	90	75	157	113
HS-20-200	20	200	20	5	105	150	17	2300	820	75	60	190	190	450	150	M48X3	125	3/4"BSP	50	M24X3	120	90	75	157	113
HS-30-50	30	50	23	7.5	135	175	17	3065	520	75	60	190	210	450	156	M48X3	125	3/4"BSP	50	M30X3.5	120	90	75	157	113
HS-30-75	30	75	23	7.5	135	175	17	3065	570	75	60	190	210	450	156	M48X3	125	3/4"BSP	50	M30X3.5	120	90	75	157	113
HS-30-100	30	100	23	7.5	135	175	17	3065	620	75	60	190	210	450	156	M48X3	125	3/4"BSP	50	M30X3.5	120	90	75	157	113
HS-30-150	30	150	23	7.5	135	175	17	3065	720	75	60	190	210	450	156	M48X3	125	3/4"BSP	50	M30X3.5	120	90	75	157	113
HS-30-200	30	200	23	7.5	135	175	17	3065	820	75	60	190	210	450	156	M48X3	125	3/4"BSP	50	M30X3.5	120	90	75	157	113
HS-50-50	50	50	31	7.5	100	180	10	2830	475	85	80	325	325	500	247	M56X3	150	1"BSP	60	M42X4.5	120	90	75	157	113
HS-50-75	50	75	31	7.5	100	180	10	2830	525	85	80	325	325	500	247	M56X3	150	1"BSP	60	M42X4.5	120	90	75	157	113
HS-50-100	50	100	31	7.5	100	180	10	2830	575	85	80	325	325	500	247	M56X3	150	1"BSP	60	M42X4.5	120	90	75	157	113
HS-50-150	50	150	31	7.5	100	180	10	2830	775	85	80	325	325	500	247	M56X3	150	1"BSP	60	M42X4.5	120	90	75	157	113
HS-50-200	50	200	31	7.5	100	180	10	2830	875	85	80	325	325	500	247	M56X3	150	1"BSP	60	M42X4.5	120	90	75	157	113

Salient Features

- Faster Action Faster than Conventional Hydraulic/Pneumatic/Hydro-Pneumatic Presses
- Energy Efficient Energy Efficient over equivalent Hydraulic/Pneumatic/ Hydro-Pneumatic Presses.
- Flexibility : Maximum Job Pressing Stroke available is upto Total stroke.
- Low Oil Temperature Powerpack oil temperature is low compare to conventional Hydraulic Presses.



HONEYTECH Controls (I) Pvt. Ltd.

239, Gobind Udyog Bhawan, Model Town, Off. L.B.S. Marg, Mulund (W), Mumbai-400080.

TEL: +91-2221641896, 21645737, Mob.: +91-9594451155

Email: info@honeytech.in • Website: www.honeytech.in